LK SERIES WIRED SHOE RACKS INSTALLATIONS

Installation Dimensions(mm)

LW=Internal cabinet width
KB=Cabinet width

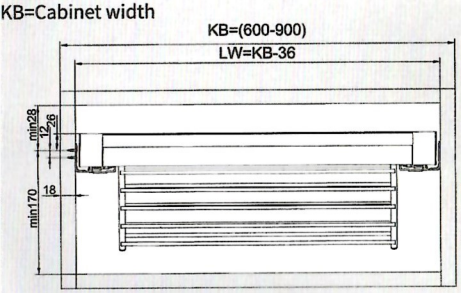

Screw Positions of the Slides (mm)

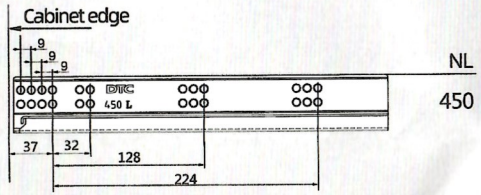

Minimum Internal cabinet depth: 453mm

Drawer Assembly

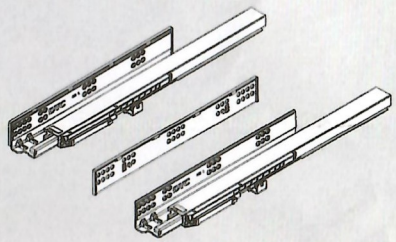



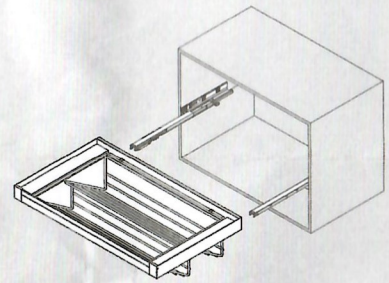



cabinet side B=16mm, no need to remove the spacer from the drawer slide.
cabinet side B=18mm,please remove the spacer from the drawer slide.

Slide into the cabinet

Removal of Inner Drawer



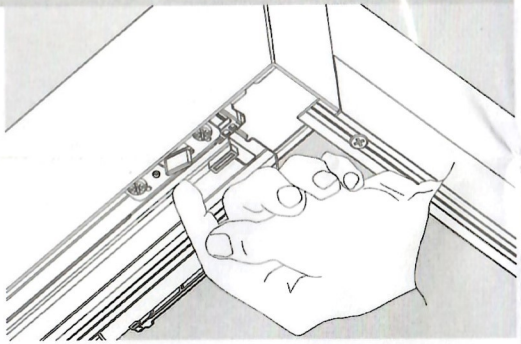

Press the locking device under drawer bottom and pull out the drawer

DTC
Global Quality Benchmark
Guangdong Dongtai Hardware Precision Manufacturing Co.,Ltd
Tel.:+86(0)757-25332283 Fax:+86(0)757-25551876
E-mail:dtc@dtcdtc.com Website:www.dtcdtc.com

302710001-04530